

CDZ 型超低噪声轴流风机性能参数

机号 NO.	转速 SPEED r/min	工 况	风量 AIR FLOW M ³ /h	全压 TOTAL PRESSURE Pa	功率 POWER KW	出口 噪声 OUTLET NOSIE dB(A)	壳体 噪声 CASING NOSIE dB(A)	重量 WEIGHT Kg
2.5-I	2900	1	1954	192	0.18 YSF-6312	64	56	16
		2	1848	202				
		3	1737	208				
		4	1647	213				
		5	1520	217				
2.5-II	1450	1	977	48	0.025 YSF-5014	54	49	15
		2	924	50				
		3	868	52				
		4	823	53				
		5	760	54				
2.8-I	2900	1	2745	242	0.25 YSF6322	68	60	19
		2	2597	254				
		3	2439	260				
		4	2314	267				
		5	2136	271				
2.8-II	1450	1	1372	60	0.04 YSF-5024	56	51	18
		2	1298	63				
		3	1219	65				
		4	1157	66				
		5	1068	67				
3.15-I	2900	1	3908	307	0.55 YSF-7122	71	63	29
		2	3697	322				
		3	3473	330				
		4	3295	338				
		5	3041	343				
3.15-II	1450	1	1954	76	0.06 YSF5614	60	55	29
		2	1848	80				
		3	1736	82				
		4	1647	84				
		5	1520	85				
3.55-I	2900	1	5595	390	1.1 YSF8022	76	67	36
		2	5293	409				
		3	4972	419				
		4	4716	430				
		5	4353	436				

CDZ 型超低噪声轴流风机性能参数


机号 NO.	转速 SPEED r/min	工 况	风量 AIR FLOW M ³ /h	全压 TOTAL PRESSURE Pa	功率 POWER KW	出口 噪声 OUTLET NOSIE dB(A)	壳体 噪声 CASING NOSIE dB(A)	重量 WEIGHT Kg
3.55-II	1450	1	2797	97	0.12 YSF-6314	60	55	29
		2	2646	102				
		3	2486	104				
		4	2358	107				
		5	2175	109				
4-I	2900	1	8003	495	2.2 YT90L-2	78	69	50
		2	7571	519				
		3	7113	532				
		4	6747	546				
		5	6228	554				
4-II	1450	1	4001	123	0.25 YSF7114	63	58	37
		2	3785	129				
		3	3556	133				
		4	3373	136				
		5	3114	138				
4.5-I	2900	1	11396	627	3 YT100L-2	81	69	74
		2	10780	657				
		3	10128	674				
		4	9607	691				
		5	8867	701				
4.5-II	1450	1	5698	156	0.37 YSF-7124	64	58	42
		2	5390	164				
		3	5064	168				
		4	4803	172				
		5	4433	175				
5-I	1450	1	7816	193	0.55 YSF8014	69	62	51
		2	7394	202				
		3	6946	208				
		4	6589	213				
		5	6082	216				
5-II	960	1	5359	193	0.25 YSF7126	60	55	40
		2	5070	202				
		3	4763	208				
		4	4518	213				
		5	4170	216				

CDZ 型超低噪声轴流风机性能参数

机号 NO.	转速 SPEED r/min	工 况	风量 AIR FLOW M ³ /h	全压 TOTAL PRESSURE Pa	功率 POWER KW	出口 噪声 OUTLET NOSIE dB(A)	壳体 噪声 CASING NOSIE dB(A)	重量 WEIGHT Kg
5.6-I	1450	1	10981	242	0.75 YSF-8024	71	62	65
		2	10388	254				
		3	9759	260				
		4	9257	267				
		5	8544	271				
5.6-II	960	1	7216	104	0.37 YSF8026	63	57	64
		2	6826	109				
		3	6413	112				
		4	6083	115				
		5	5615	117				
6.3-I	1450	1	15858	306	2.2 Y100L1-4	77	69	91
		2	15002	331				
		3	14094	339				
		4	13369	348				
		5	12340	353				
6.3-II	960	1	10498	138	0.55 Y8026	66	60	70
		2	9931	145				
		3	9330	148				
		4	8850	152				
		5	8186	155				
7.1-I	1450	1	23179	418	4 112M-4	80	69	150
		2	21928	438				
		3	20600	449				
		4	19541	461				
		5	18036	468				
7.1-II	960	1	15026	176	1.1 Y90L-6	69	62	130
		2	14215	184				
		3	13354	189				
		4	12668	194				
		5	11692	196				
8-I	1450	1	33158	531	7.5 Y132M-4	83	71	186
		2	31368	557				
		3	29469	571				
		4	27954	586				
		5	25802	594				

CDZ 型超低噪声轴流风机性能参数

机号 NO.	转速 SPEED r/min	工 况	风量 AIR FLOW M ³ /h	全压 TOTAL PRESSURE Pa	功率 POWER KW	出口 噪声 OUTLET NOSIE dB(A)	壳体 噪声 CASING NOSIE dB(A)	重量 WEIGHT Kg
8-II	960	1	21495	223	2.2 Y112M-6	75	66	168
		2	20335	234				
		3	19104	240				
		4	18122	246				
		5	16726	250				
9-I	960	1	30606	282	3 Y132S-6	82	70	204
		2	28954	296				
		3	27201	303				
		4	25802	311				
		5	23816	316				
9-II	720	1	23117	161	1.5 Y112M-8	74	64	173
		2	21869	169				
		3	20545	173				
		4	19489	177				
		5	17988	180				
10-I	960	1	42877	364	5.5 Y132M2-6	82	80	207
		2	40563	381				
		3	38106	391				
		4	36147	401				
		5	33364	407				
10-II	720	1	31711	199	3 Y132M-8	78	70	197
		2	29999	208				
		3	28183	214				
		4	26734	219				
		5	24676	222				
11.2-I	960	1	60239	456	11 Y160L-6	88	75	352
		2	56988	478				
		3	53537	490				
		4	50784	503				
		5	46875	511				
11.2-II	720	1	45179	256	4 Y160M1-8	82	70	307
		2	42741	269				
		3	40153	276				
		4	38088	283				
		5	35156	287				

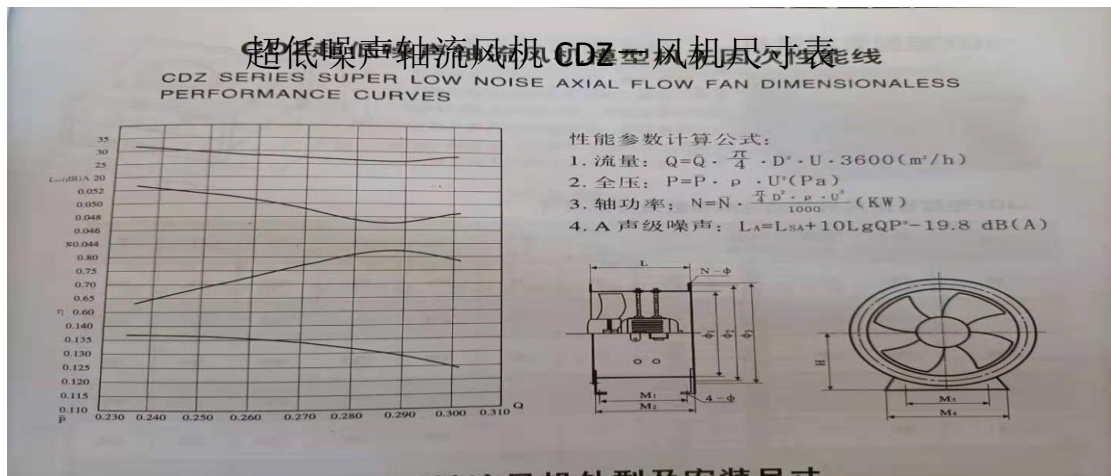

CDZ 轴流风机外形及安装尺寸

序号	型号	φ1	φ2	φ3	M1	M2	M3	M4	H	L	N-φ	4-φ
1	CDZ-2.5T	252	280	306	256	296	140	200	180	300	4-φ10	10.5
2	CDZ-2.5F	252	280	306	256	296	140	200	180	300	4-φ10	10.5
3	CDZ-2.8T	282	320	346	256	296	170	230	200	300	4-φ10	10.5
4	CDZ-2.8F	282	320	346	256	296	170	230	200	300	4-φ10	10.5
5	CDZ-3.15T	317	355	381	256	296	180	250	230	300	8-φ10	10.5
6	CDZ-3.15F	317	355	381	256	296	180	250	230	300	8-φ10	10.5
7	CDZ-3.55T	357	395	421	271	316	200	280	250	320	8-φ10	12.5
8	CDZ-3.55F	357	395	421	256	296	200	280	250	300	8-φ10	12.5
9	CDZ-4T	402	450	480	300	345	220	320	260	350	8-φ12	12.5
10	CDZ-4F	402	450	480	256	296	220	320	260	300	8-φ12	12.5
11	CDZ-4.5T	452	500	530	315	365	260	360	285	370	8-φ12	12.5
12	CDZ-4.5F	452	500	530	255	305	260	360	285	310	8-φ12	12.5
13	CDZ-5F	503	560	590	270	325	300	400	330	330	12-φ12	14.5
14	CDZ-5S	503	560	590	260	315	300	400	330	320	12-φ12	14.5

CDZ 轴流风机外形及安装尺寸

序号	型号	φ1	φ2	φ3	M1	M2	M3	M4	H	L	N-φ	4-φ
15	CDZ-5.6F	563	620	650	305	355	350	450	360	360	12-φ12	14.5
16	CDZ-5.6S	563	620	650	290	345	350	450	360	350	12-φ12	14.5
17	CDZ-6.3F	633	690	720	384	444	405	505	395	450	12-φ12	16.5
18	CDZ-6.3S	633	690	720	314	374	405	505	395	380	12-φ12	16.5
19	CDZ-7.1F	713	770	800	394	454	460	560	435	460	16-φ12	16.5
20	CDZ-7.1S	713	770	800	374	434	460	560	435	430	16-φ12	16.5
21	CDZ-8F	804	860	890	504	564	540	640	480	570	16-φ12	16.5
22	CDZ-8S	804	860	890	414	474	540	640	480	480	16-φ12	16.5
23	CDZ-9S	904	970	1004	469	534	620	720	530	540	16-φ15	19.5
24	CDZ-9E	904	970	1004	419	484	620	720	530	490	16-φ15	19.5
25	CDZ-10S	1004	1070	1104	519	584	700	800	580	590	16-φ15	19.5
26	CDZ-10E	1004	1070	1104	519	584	700	800	580	590	16-φ15	19.5
27	CDZ-11.2S	1124	1190	1224	592	662	790	890	640	670	16-φ15	19.5